

MODEL 6060



Glass Bead Cabinets
413-566-1255
www.glassbeadcabinets.com



6060 TECHNICAL SPECIFICATIONS



6060 Cabinet with Reclaimer and Dust Collectors

MODEL NUMBER	RECLAIMER CFM	DUST COLLECTOR	ESTIMATED SHIPPING WEIGHT	FLOOR AREA REQUIRED (W)	FLOOR AREA REQUIRED (D)
6060-9DC-3	900	D20 DC	1600	141"	132"
6060-9M4DC-3	900	M4DC	1700	141"	132"
6060-9RPJ2DC-3	900	RPJ2	1700	141"	132"
6060-9RPJH2DC-3	900	RPJH2	1725	141"	132"

RECLAIMER AND D10 DUST COLLECTOR

CABINET CONSTRUCTION:

14 Gauge Reinforced Continuously Welded.
45 Degree Minimum Sump Media Flow.

FINISH:

Durable Enamel
Primed and Painted: Corrosion Resistant

WORKING CHAMBER:

Dimensions: 60"W x 60"D x 42"H
Double Walled Doors
Safety Door Interlocks
Self Adjusting Door Latches
Knife Edge, Seal Sealing, Full Gaskets
Full Length Hinges

VIEWING WINDOW:

12 1/2" H x 21" W
Quick Change, Square Cornered, Tempered Glass
Mylar Dispenser

LIGHTING:

(2) Two Tube, 24" Fluorescent Fixture Low Temperature,
T8, Shielded, Externally Located
120 V 60 HZ

FOOT VALVE:

For Instant Changing From Right to Left Foot
On/Off Air Logic Controls

MEDIA BLASTING GUN:

Lightweight Aluminum Pistol Grip,
5/32" Air Orifice Standard
4/32", 6/32", 7/32" Orifices Optional.
Operated Right or Left Handed

Air Requirements (CFM)	Gun #	40 PSI	60 PSI	80 PSI
1/4" nozzle 1/8" Orifice	4	12	17	21
5/16" nozzle, 5/32" Orifice	5	19	27	34
3/8" nozzle, 3/16" Orifice	6	27	37	47
7/16" nozzle, 7/32" Orifice	7	38	52	66

GLOVES:


Abrasive Resistant, Cloth Lined, Full Length Snap-In Gloves
Static Resistant

HOSES:


1/2" ID Lightweight, Flexible, Abrasive Resistant

BLOW OFF GUN:

Fingertip Control Blow Off Nozzle

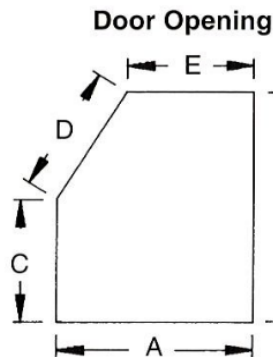

A	B	C	D	E
54"	40"	21"	21"	37"

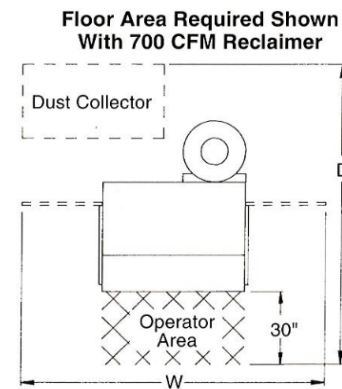

SPECIFICATIONS

RECLAIMER	DUST COLLECTORS
Cyclone Centrifugal Type Removable Screen Basket All Steel Construction Adjustable Air Wash	D20 Pull Through: (900) CFM 2 HP 52" W X 33"D X 80" H Manual Pneumatic Bagshaker 49 Dust Bags
700 CFM SYSTEM: 1 HP 20 Amp Service	RPJ2/DRAWER 5'10" X 2'6" X 7'9"
900 C FM SYSTEM: 2 HP 3 Phase 230 Volts 8 Amp 460 Volts 4 Amp	RPJ2H/HOPPER 5'10" X 2'6" X 12' 2-36" Cartridges Automatic Reverse Pulse Cleaning

M4 Pull Through:

4 Cartridge
(900) CFM 2 HP
36" W x 42" D x 80" H